



Turn to the Experts.™

# Fan Coil Open

*integrated fan coil controller*

Carrier's Fan Coil Open Controller is an integrated component of a Carrier fan coil unit. The Fan Coil Open controller continuously monitors and regulates fan coil operation with reliability and precision. This advanced controller features a sophisticated, factory-engineered control program that provides optimum performance and energy efficiency. The Fan Coil Open controller also features plug-and-play connectivity to the Carrier i-Vu Open Control System. The Carrier i-Vu Open Control System combines state-of-the-art Carrier equipment, plug-and-play controllers, and the powerful, web-based i-Vu user interface to form a cohesive, intuitive, and fully-integrated BACnet® Building Automation System.

For added flexibility, the Fan Coil Open controller is capable of stand-alone operation, or it can be integrated with any Building Automation System utilizing the BACnet protocol.

## Application Features


- Controls modulating or 2-position hot water/steam valves or up to 1 stage of electric heat to maintain space temperature setpoint
- Controls modulating or 2-position chilled water valves or a single stage of DX cooling to maintain space temperature setpoint
- Controls 2-position outside air damper to meet ASHRAE 62 ventilation requirements
- Built-in advanced control routines for zone level humidity control or zone level demand control ventilation (ASHRAE 62)
- Optimal start and PID control for maximum occupant comfort
- Automatic fan speed control for matching fan speed to actual cooling or heating requirements, thus allowing the fan to run at the lowest capable setting to maintain room setpoint

## System Benefits

- Fully plug-and-play with the Carrier i-Vu Open Control System
- Supports demand limiting for maximum energy savings
- Compatible with i-Vu Tenant Billing for tracking tenants' after-hours energy usage


## Hardware Features

- Compatible with 42D, 42C, 42S, and 42V fan coils
- Integrates easily into any BAS using the BACnet MS/TP protocol
- On-board hardware clock, remote occupancy input, and support for SPT/thermistor sensors provides stand-alone operation
- Thermostat linkage allows up to 8 fan coils to operate from 1 sensor
- Easy startup and commissioning using Carrier's BACview Handheld Configuration Tool

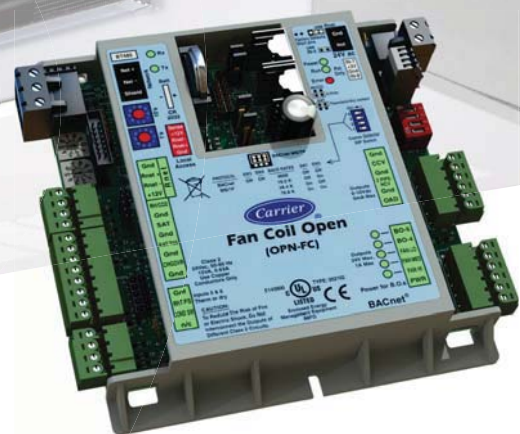

# Specifications

BACnet Support	Advanced Application Controller (B-AAC), as defined in BACnet 135-2001 Annex L
Communication Ports	<b>Network port:</b> EIA-485 port for BACnet MS/TP communications (baud rate is DIP switch selectable); <b>Comm Option port:</b> For connecting a LON Option Card (future); <b>Local Access port:</b> For system start-up and troubleshooting using a PC or BACview (115.2 kbps); <b>Rnet port:</b> For connecting SPT room sensors. The Rnet port supports up to 4 SPT Standard sensors and 1 SPT Plus or SPT Pro sensor for averaging or high/low select control.
Inputs	<b>2 binary inputs:</b> Remote Occupancy Contact/Fan Status, and Condensate Overflow. <b>4 analog inputs:</b> RH/CO2 (0-5VDC), SAT (10k thermistor), RAT/T55 (10k thermistor), and Changeover Switch (dry contact)/Changeover Sensor (10k thermistor). AI's have 10 bit A/D resolution.
Outputs	<b>5 binary outputs:</b> High Speed Fan, Medium Speed Fan, Low Speed Fan, Two-Pipe Valve/Heating Valve/Electric Heat Stage 1, and Cooling Valve/Electric Heat Stage 1 with Type 5 Heat & 2-Pipe. Relay contacts rated at 1 A max. @ 24 VAC/VDC, configured normally open. <b>3 analog outputs:</b> OA Damper, 2-Pipe/Heating Valve, and Cooling Valve. AO's rated at 0-10VDC, 5mA max, with 8 bit D/A resolution using filtered PWM.
Protection	Incoming power and network connections are protected by non-replaceable internal solid-state polyswitches that reset themselves when the condition that causes a fault returns to normal. The power, network, input, and output connections are also protected against voltage transient and surge events.
Real Time Clock	Battery-backed real time clock keeps track of time in event of power failure
Battery	10-year Lithium CR2032 battery provides a minimum of 10,000 hours of trend data & time retention during power outages
Status Indicators	LED status indicators for communications, run status, error, power, and all digital outputs
Controller Addressing	Rotary DIP switches set BACnet MS/TP MAC address of controller
Listed by	UL-916 (PAZX), cUL-916 (PAZX7), FCC Part 15-Subpart B-Class A, CE EN50082-1997
Operating Temperature	0 to 130°F (-18 to 54°C), 10–90% relative humidity, non-condensing
Storage Temperature	-24 to 140°F (-30 to 60°C), 10–90% relative humidity, non-condensing
Power Requirements	24VAC ± 10%, 50-60Hz 18 VA power consumption (24 VA with BACview) 26VDC (25V min, 30V max) Single Class 2 source only, 100 VA or less

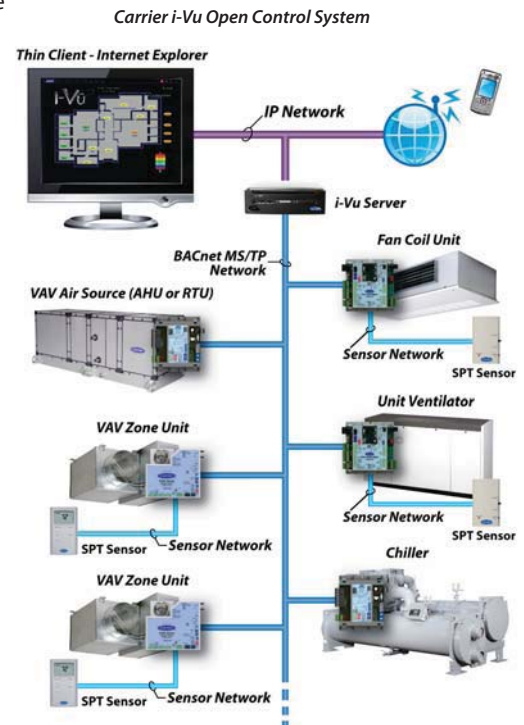

Turn to the Experts.™

[www.carrier.com](http://www.carrier.com)  
1-800-CARRIER

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs, without notice or without incurring obligations.

CARRIER CORPORATION ©2010

A member of the United Technologies Corporation family.  
Stock symbol UTX. 11-808-467-01 Rev. 06/10